4 Burner Drop-In Gas BBQ in Black

4000DG-SL-SS









Features & Benefits

Warranty	3 Year Manufacturer Warranty	
Stylish Drop-In Design	A modern, classy finish where the BBQ drops down into the benchtop of your cabinetry. The slimline enclosed hood helps to give a more low-profile look to the BBQ.	
Slimline Double-Skinned Hood	Double layer within the hood offers improved insulation and heat retention when cooking with the hood closed resulting in improved efficiency and a more steady temperature.	
Integrated Thermostat	Cleverly integrated into the enclosed hood, the thermostat helps provide an accurate reading of the internal temperature for roasting with the hood closed.	
High Quality Burners With Even Heat Dispersion	4 x high quality tube burners made from 304 grade stainless steel. Flame tamers assist with even heat distribution while reducing flare ups, providing excellent grilling experience.	
304 Grade Stainless Steel	High grade stainless steel which is very resistant to heat and salt helping to avoid corrosion and decay within the harsh Australian climate.	
Stainless Steel Warming Rack	Provides additional space for already cooked food that you want to keep warm.	
Cast Iron Grill Plates	Features 1 x open grill plate and 1 x solid/flat grill plate which is reversible for either a smooth or ridged finish. Plates are made from cast iron allowing for even heat distribution and retention making them ideal for searing & grilling.	
Comfort Electronic Ignition System	Safe and easy allowing you to light without the use of flammable and explosive matches and lighters.	
Ergonomic Controls	Conveniently located to the side of the BBQ helping maximise the grilling surface with power level indicators.	
Blue LED Lighting on Controls	Each control knob features long-lasting & energy efficient blue LED lights helping to make night time entertaining super easy and safe.	
UV Protected Cover	Last longer and look better with the free weather proof cover	
Oil Management System	Easy access and simple cleaning with the removable grease cup.	
Conversion To Natural Gas	Equipped for LPG out of the box and can be converted for usage with Natural Gas by an authorised professional. (Conversion kit needs to be purchased separately)	
Indoor/Outdoor Installation	Certified for installation in enclosed alfresco areas; this is where your area is enclosed by a roof and 3 walls, and the area has 25% natural air ventilation.	



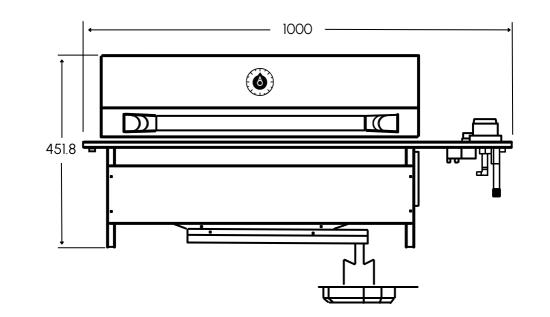

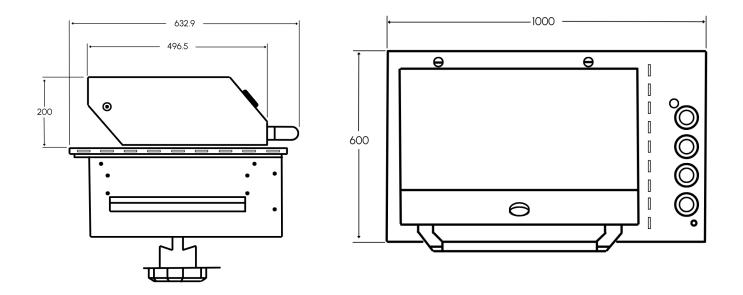

WARNING: Technical specifications and product sizes can be varied by the manufacturer without notice. Cut outs for appliances should only be physical product measurements. The above information is indicative only.

Minimum clearances to combustible materials must be maintained.


For Natural Gas Conversion please refer to the product user manual. This processed should only be done by an authorised professional.

4 Burner Drop-In Gas BBQ in Black

4000DG-SL-SS




Installation - Cabinetry Cut-Out

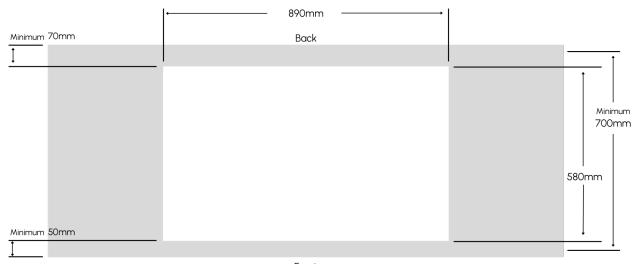

Front

Installation - Minimum Clearances

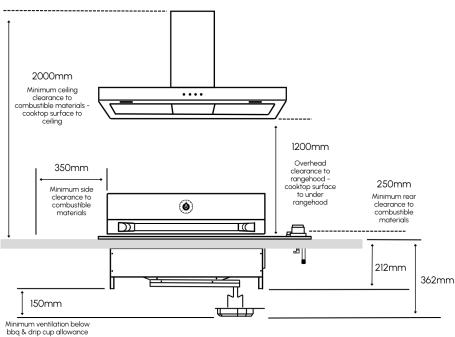

- \cdot The cabinetry must allow front access underneath the BBQ to allow access to clean/remove the drip cup
- The bunchtop/substrate must be able to support the weight of the BBQ which is mentioned in the technical specifications. We recommend a minimum thickness 20mm for the benchtop
- If an LPG bottle is to be stored in the enclosure under the BBQ unit, it must be isolated from the BBQ unit with a non-combustible panel. The enclosure must comply with the requirements of AS/NZS 5601.1. This is to allow any residual gas to escape from the cavity.

WARNING: Technical specifications and product sizes can be varied by the manufacturer without notice. Cut outs for appliances should only be physical product measurements. The above information is indicative only.

Minimum clearances to combustible materials must be maintained.

For Natural Gas Conversion please refer to the product user manual. This processed should only be done by an authorised professional.

4 Burner Drop-In Gas BBQ in Black 4000DG-SL-SS



Model	4000DG-SL-BLK
Fuel	LPG Standard - Conversion to Natural Gas with conversion kit - see user manual
Indoor/Outdoor Installation	Certified for installation in enclosed alfresco areas; this is where your area is enclosed by a roof and 3 walls, and the area has 25% natural air ventilation. Recommended range hood with optional Interlocking System.
BBQ Construction	304 Grade Stainless Steel
Tube Burners	304 Grade Stainless Steel
Flame Tamers	304 Grade Stainless Steel
Double Skinned Hood	Yes
Total Gas Consumption LPG	48mj/h (12mj/h each burner)
Total Gas Consumption Natural Gas	44mj/h (11mj/h each burner)
Motorised Rotisserie	No
Control Lighting	Blue LED Lighting on Control Knobs
Internal Cavity Lighting	No
Ignition	Comfort Electronic Ignition System
Flame Failure Safety Shut-Off	No
Grill Plate Material	Cast Iron
Total Cooking Area	(w) 750mm x (d) 450mm
Open Grill Plate Dimension	1 x (w) 350mm x (d) 450mm
Solid Flat Grill Plate Dimension	1 x (w) 350mm x (d) 450mm
Gross Product Weight	49.5kg
Total Product Dimensions (hood closed)	(w) 1000mm x (d) 635mm x (h) 581mm includes drip cup
Cut Out Dimensions	 (w) 980mm x (d) 580mm x (h) 1200mm min Clearance of 390mm required below benchtop Recommended benchtop thickness 20mm 50mm front clearance + 70mm rear clearance
	Refer to dimensional drawings for more installation guides