Drop-In Side Burner Cooktop in Stainless Steel














Features & Benefits


Warranty	3 Year Manufacturer Warranty
Stylish Drop-In Design	A modern, classy finish where the side burner drops down into the benchtop next to your BBQ into your cabinetry. The slimline design helps to give a more low-profile look.
High Quality Cast Iron Tube Burner	Durable and high powered gas cooktop which is capable of reaching high cooking temperatures.
304 Grade Stainless Steel	High grade stainless steel which is resistant to heat and salt, helping to avoid corrosion and decay in the harsh Australian climate.
Comfort Electronic Ignition System	Safe and easy allowing you to light without the use of flammable and explosive matches and lighters.
Ergonomic Controls	Conveniently located to the front of the side burner helping maximise the cooking surface with power level indicators.
Conversion To Natural Gas	Equipped for LPG out of the box and can be converted for usage with Natural Gas by an authorised professional. (Conversion kit needs to be purchased separately)
Indoor/Outdoor Installation	Certified for installation in enclosed alfresco areas; this is where your area is enclosed by a roof and 3 walls, and the area has 25% natural air ventilation.





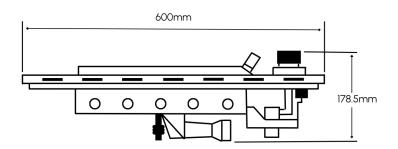



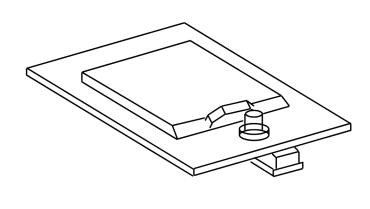

WARNING: Technical specifications and product sizes can be varied by the manufacturer without notice. Cut outs for appliances should only be physical product measurements. The above information is indicative only.


Minimum clearances to combustible materials must be maintained.

For Natural Gas Conversion please refer to the product user manual. This processed should only be done by an authorised professional.


Drop-In Side Burner Cooktop in Stainless Steel SMA-DSG0010-SS



Installation - Cabinetry Cut Out

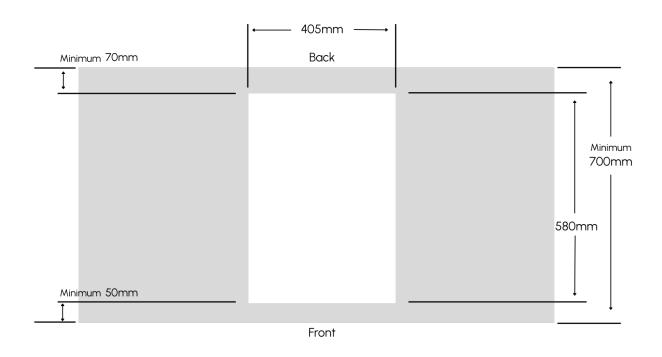

Installation - Minimum Clearances

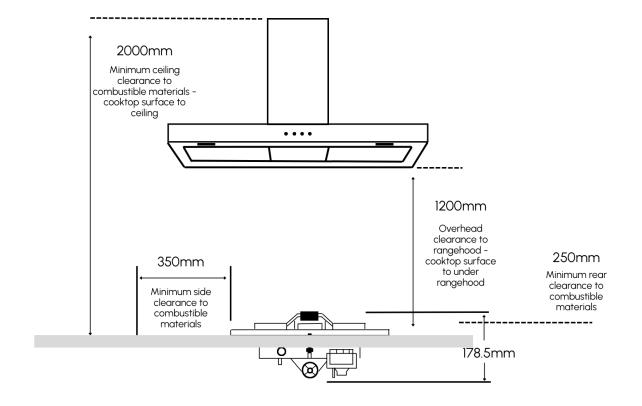

Drop-In Side Burner Cooktop in Stainless Steel





Model	SMA-DSG0010-SS
Fuel	LPG Standard - Conversion to Natural Gas with conversion kit - see user manual
Indoor/Outdoor Installation	Certified for installation in enclosed alfresco areas; this is where your area is enclosed by a roof and 3 walls, and the area has 25% natural air ventilation. Recommended range hood with optional Interlocking System.
BBQ Construction	304 Grade Stainless Steel
Tube Burners	Cast Iron
Total Gas Consumption LPG	11.5mj/h
Total Gas Consumption Natural Gas	12.5mj/h (11mj/h each burner)
Motorised Rotisserie	No
Control Lighting	Blue LED Lighting on Control Knob
Internal Cavity Lighting	No
Ignition	Comfort Electronic Ignition System
Flame Failure Safety Shut-Off	No
Gross Product Weight	49.5kg
Total Product Dimensions (hood closed)	(w) 425mm x (d) 600mm x (h) 178.5mm
Cut Out Dimensions	 (w) 405mm x (d) 580mm x (h) 1200mm min Clearance of 390mm required below benchtop Recommended benchtop thickness 20mm 50mm front clearance + 70mm rear clearance Refer to dimensional drawings for more installation guides

WARNING: Technical specifications and product sizes can be varied by the manufacturer without notice. Cut outs for appliances should only be physical product measurements. The above information is indicative only.

Minimum clearances to combustible materials must be maintained.

For Natural Gas Conversion please refer to the product user manual. This processed should only be done by an authorised professional.